




# SNZCXS Hexalobular Socket Extra Low Profile Miniature Screw

Protrusion Miniature Size SUS Stainless steel

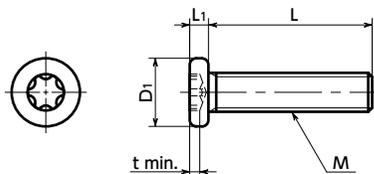

## ● Application

Reducing the size of equipment and devices  
Compact precision equipment

## ● Material/Finish



	<b>SNZCXS</b>
Main Body	SUSXM7 (Equivalent to SUS304)

## ● Part Number Specification

**SNZCXS-M2-3**



- M1.4-M2.5. Miniature screws for precision instruments.
- Flat head machine screw type with low head height. For space-saving of equipment/devices and applications with limited overhead space.
- Screw heads are unlikely to be damaged due to tightening, allowing safe and secure tightening to be performed.
- Install and remove with **SKX** Dedicated Wrench or **SKXB** Dedicated Bit and **SRD** Dedicated Magnetic Screwdriver together.

Part Number	Applicable Wrench	Applicable Bit
<b>SNZCXS-M1.4</b>	—	SKXB-3
<b>SNZCXS-M1.6</b>	SKX-4	SKXB-4
<b>SNZCXS-M2</b>	SKX-5	SKXB-5
<b>SNZCXS-M2.5</b>	SKX-6	SKXB-6

- Use the **SKX-N** hexalobular wrench for extremely limited access spaces for mounting and removing in tight spaces.
- We manufacture products with special specifications such as ventilation holes, cleanroom washing and special packaging.

Unit : mm

Part Number	M (Coarse)										D1	L1	Hexalobular Socket No.	t min.	Max. Torque (N·m)	Mass (g)	Qty per Pack
	Nominal of Thread	Pitch	2	3	4	5	6	8	10								
<b>SNZCXS-M1.4</b>	M1.4	0.3	2	3	4	5	6	8	10	2	0.5	3	0.25	0.07	0.024 - 0.09	50	
<b>SNZCXS-M1.6</b>	M1.6	0.35	2	3	4	5	6	8	10	2.4	0.5	4	0.3	0.1	0.04 - 0.12	50	
<b>SNZCXS-M2</b>	M2	0.4	2	3	4	5	6	8	10	3	0.6	5	0.35	0.22	0.062 - 0.2	50	
<b>SNZCXS-M2.5</b>	M2.5	0.45	3	4	5	6	8	10	4	0.8	6	0.55	0.46	0.12 - 0.34	50		

● When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

## ● Related Products

**SKX** Hexalobular Wrench



**SKXB** Hexalobular Short Bit



**SKX-N** Hexalobular Wrench for Extremely Limited Access Spaces



**SRD** Magnet Screwdriver



Individual Sales Available / Add'l charge	Cleanroom Wash & Packaging Available / Add'l charge	Screw Length Adjustment Not Available	Vibration Resistant Available / Add'l charge	Modification process for captive use Not Available
---	---	---------------------------------------	--	--