


SVSHL Vented Socket Head Cap Screws with Ultra Low Profile - 316L Stainless Steel



Vacuum
 Protrusion
 Cleanroom wash & packaging
 Non-Magnetic
 SUS Stainless steel

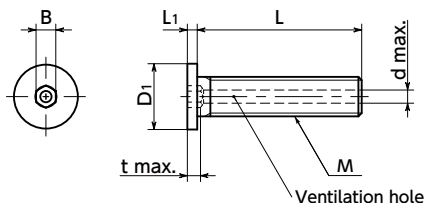


Material/Finish



	SVSHL
Main Body	SUS316L
Strength Class	A4 - 70

Usage example

Effective with vacuum devices and vacuum chambers that require the exhaustion of gas trapped in screw holes.

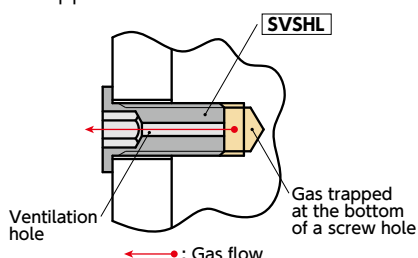

- The ventilation hole easily releases gas trapped in the screw holes of equipment and machines, and supports vacuum drawing of vacuum devices.
- These are high-strength hex socket head cap screws with special low profiles. All head heights are 1.5 mm or less. For space-saving of equipment/devices and applications with limited overhead space.
- Made of SUS316L. It has excellent corrosion resistance.
- Non-magnetic.
- Cleanroom wash/cleanroom packing provided. → P. xxx
- To distinguish from **SVSHS**, **SVSHL** has a cup point tip.
- Application

Vacuum devices / Vacuum chambers / FPD production equipment / Semiconductor manufacturing equipment / Electron microscopes

Unit : mm

Part Number	M (Coarse)												
	Nominal of Thread	Pitch	L			D1	L1	B	t max.	d max.	Mass (g)	Qty per Pack	
SVSHL-M3	M3	0.5	6	8	10	6	1.3	1.5	2	1.2	0.41 - 0.58	10	
SVSHL-M4	M4	0.7	6	8	10	8	1.5	2	2.5	1.5	0.72 - 1.1	10	
SVSHL-M5	M5	0.8	8	10	12	9	1.5	3	3	1.5	1.4 - 1.9	10	

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

Part number specification

SVSHL-M3-10

Individual Sales → P. xxxxx	Cleanroom Wash & Packaging → P. xxxxx	Screw Length Adjustment → P. xxxxx	Vibration Resistant → P. xxxxx	Modification process for captive use → P. xxxxx
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Not Available