




# SNSS-J Socket Head Cap Screws

**SUS** Stainless steel

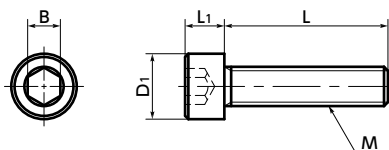

- Conforms to JIS B 1176, ISO 4762, and DIN 912.
- M3 - M16. Selection from abundant size variations is available to suit the device or equipment.
- Captive Processing Service is supported for M10 and M12.
- M3 to M8 captive-processed hex socket head cap screws **SSC** are available.

## • Material/Finish



|                | SNSS-J                        |
|----------------|-------------------------------|
| Main Body      | SUSXM7 (Equivalent to SUS304) |
| Strength Class | A2-70                         |

Unit : mm

| Part Number <b>1</b> | M (Coarse)        |       | L <b>2</b> |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | D1  | L1 | B   | Mass (g)   | Qty per Pack |
|----------------------|-------------------|-------|------------|---|---|---|----|----|----|----|--|--|--|--|--|--|--|--|-----|----|-----|------------|--------------|
|                      | Nominal of Thread | Pitch | 4          | 5 | 6 | 8 | 10 | 12 | 16 | 20 |  |  |  |  |  |  |  |  |     |    |     |            |              |
| <b>SNSS-M3</b>       | M3                | 0.5   |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 5.5 | 3  | 2.5 | 0.63 - 1.4 | 20           |
| <b>SNSS-M4</b>       | M4                | 0.7   |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 7   | 4  | 3   | 1.4 - 3.2  | 20           |
| <b>SNSS-M5</b>       | M5                | 0.8   |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 8.5 | 5  | 4   | 2.2 - 4.8  | 20           |
| <b>SNSS-M6</b>       | M6                | 1     |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 10  | 6  | 5   | 4.3 - 8.3  | 20           |
| <b>SNSS-M8</b>       | M8                | 1.25  |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 13  | 8  | 6   | 10 - 19    | 10           |
| <b>SNSS-M10</b>      | M10               | 1.5   |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 16  | 10 | 8   | 21 - 33    | 5            |
| <b>SNSS-M12</b>      | M12               | 1.75  |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 18  | 12 | 10  | 39 - 55    | 1            |
| <b>SNSS-M16</b>      | M16               | 2     |            |   |   |   |    |    |    |    |  |  |  |  |  |  |  |  | 24  | 16 | 14  | 91 - 122   | 1            |

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

## • Part Number Specification

**SNSS-M5 - 12**



|                           |                            |                          |                          |                                      |
|---------------------------|----------------------------|--------------------------|--------------------------|--------------------------------------|
| <b>1</b> Individual Sales | Cleanroom Wash & Packaging | Screw Length Adjustment  | Vibration Resistant      | Modification process for captive use |
| Available / Add'l charge  | Available / Add'l charge   | Available / Add'l charge | Available / Add'l charge | Please feel free to contact us       |