




SRP-TZB Cross Recessed (with Pin) Pan Head Machine Screws

Tamper Resistance

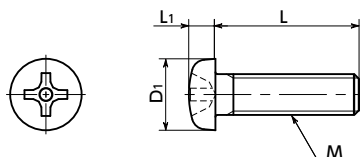

Material/Finish



	SRP-TZB
Main Body	Steel Trivalent Chromate
Strength Class	4.8 Equivalent



- Pan head machine screws with a pin at the center of the cross recess.
- This prevents mounting and removing with regular tools.
- Install and remove with **SRCB** dedicated bits and **SRD** dedicated magnetic screwdriver in combination.

Application

Equipment/devices disassembly/tampering prevention
Theft prevention for outdoor facilities
Security measures
Safety measures

Unit : mm

Part Number	M (Coarse)		L				D1	L1	Cross-recessed Socket No.	Bit Part No.	Screwdriver Part No.	Mass (g)	Qty per Pack	
	Nominal of Thread	Pitch												
SRP-M3-TZB	M3	0.5	6	8	10		5.5	2	2	SRCB-2	SRD-6.35	0.45 - 0.62	20	
SRP-M4-TZB	M4	0.7	6		10	16	7	2.6	2	SRCB-2	SRD-6.35	0.97 - 1.67	20	
SRP-M5-TZB	M5	0.8			10	16	20	9	3.3	2	SRCB-2	SRD-6.35	2.25 - 3.43	20
SRP-M6-TZB	M6	1			10	16	20	10.5	3.9	3	SRCB-3	SRD-6.35	3.5 - 5	20

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

Related Products

SRCB applicable bits are available.




Dedicated magnetic screwdrivers **SRD** are available.



Part Number Specification

SRP-M5-16-TZB



1 Individual Sales	Cleanroom Wash & Packaging	Screw Length Adjustment	Vibration Resistant	Modification process for captive use
Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Available / Add'l charge	Not Available